8x16mm RGB LED Neon Flex

RGB colour changing | Horizontal / Side Bend | 24V DC | IP67

BEND	BODY	CUT INTERVAL	MAXIMUM RUN	SUPPLY
Horizontal	**8x16mm**	**55.6mm**	**8 Metre**	**24V DC**

SPECIFICATIONS

Property	Specification
Colour	RGB colour changing
Supply voltage	24V DC
Body cross-section	8x16mm
Cut interval	55.6mm (5.56cm)
Maximum single-end run	8 Metre
Bend direction	Horizontal / Side Bend
Min. bend diameter	120mm (60mm radius)
Beam angle	120°
Body construction	Solid silicone extrusion
Housing colour	White
Body protection	IP67
Rated power	12.9 W/m
LEDs per metre	108
Lumens per metre	168.83 lm/m (RGB mix)
LED package	SMD5050
Control	PWM RGB; non-addressable
Connection	Four-core: V+, R, G, B
Dimming	Compatible RGB controller
Warranty	4 Years
Order length	Custom cut / made to order

Single-end runs up to 8 Metre. Cut only at the printed 55.6mm marks. RGB mixed white has no dedicated white LED channel.

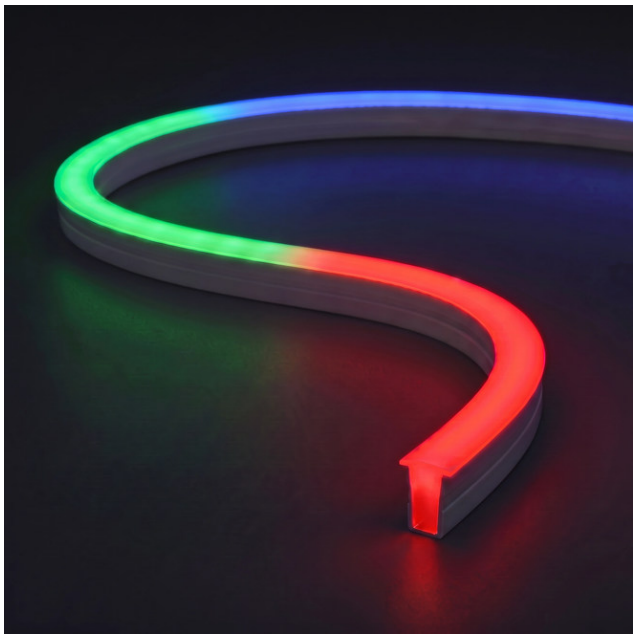

Solid silicone construction

Spot-free light from a compact silicone body, designed for horizontal curves in architectural and outdoor installations.

RGB colour illustration; the whole run changes colour together.

COMPACT DIMENSIONS



8mm body width

16mm body height

T-shaped emitting top
120° beam
Horizontal bend only

Made to measure: custom cut and made to order within the permitted cut marks and maximum run.

Performance & selection

8x16mm | RGB colour changing | 24V DC | 55.6mm cut | 8 Metre single-end feed

LIGHT OUTPUT & CONTROL

168.83 lm/m	108	12.9 W/m	PWM RGB
RGB mixed output	LEDs per metre	Rated power	Whole run together

BODY DIMENSIONS, HOUSING & BEAM



FLAT SURFACE:120°



BENDING DIRECTION:
HORIZONTAL

8x16mm body cross-section | Horizontal bend | 120° beam. Fitting and channel dimensions are separate.

ELECTRICAL SELECTION & RGB WIRING

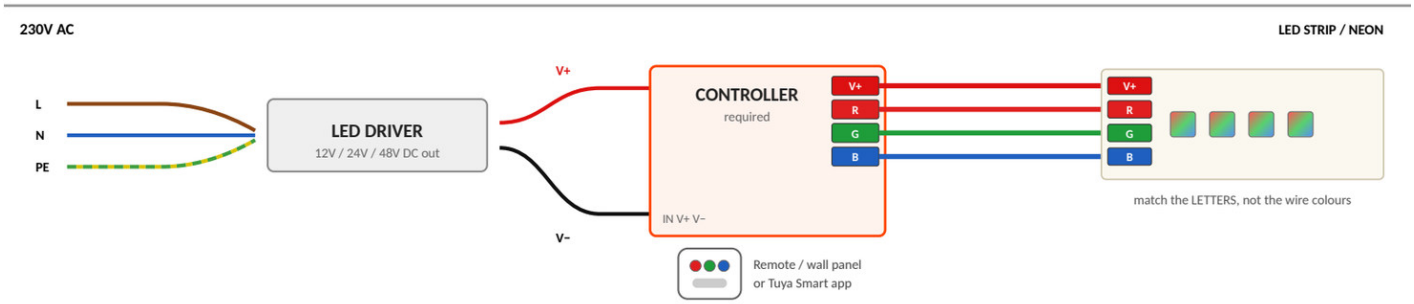

Use 24V DC for this model. Check polarity and match the terminal labels V+, R, G and B; wire colours can vary. The controller sits between the power supply and the neon.

Rated load = 12.9W/m x length. An 8 Metre run is 103.2W before driver allowance. Nominal current is 0.537A/m (calculated). Select a 24V constant-voltage supply and RGB controller with adequate total and per-channel capacity; follow their load allowances. Check cable voltage drop.

Never connect directly to mains. Keep independent power-supply outputs separate. Lifetime and operating temperature: to be confirmed for this RGB model.

Connection accessories

IP67 fitting options | Four-core RGB connection | Confirm the matching termination system

Select the cable exit for your custom-cut length. Drawing callouts apply to the illustrated fittings, not the neon body or conductor gauge. Confirm RGB compatibility and sealing requirements with the order.

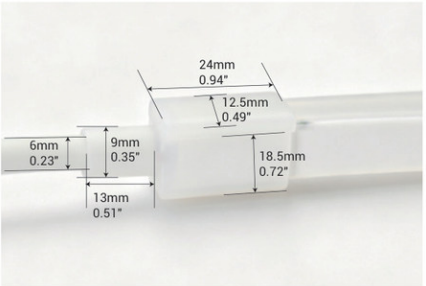

Front cable exit

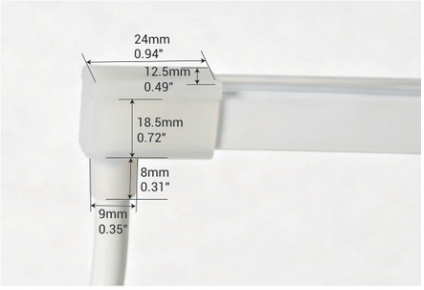

Bottom cable exit

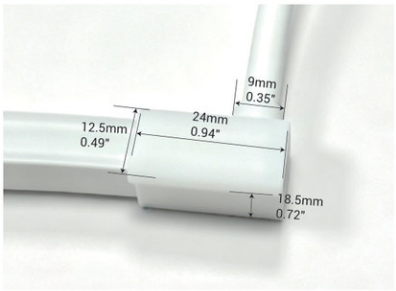

Left cable exit

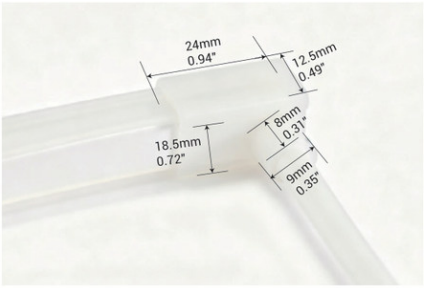

Right cable exit

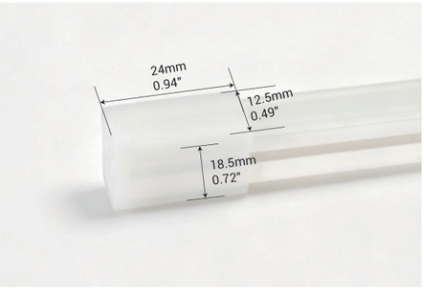

Closed end cap

Four-core RGB
V+ common positive, R, G and B.

Confirm the fitting, exit direction and sealing kit for the order.

SILICONE CROSS-SECTION



Body construction
Light-diffusing silicone surface
Solid silicone outer layer
Internal LED source

Body and connector protection are separate. Seal all exposed ends and joints.

20cm four-core cable is included. Optional 1-5 Metre leads are available. Cable size must suit the installed load and distance.

Body protection is IP67. Connector markings alone do not establish the rating of the finished assembly. Seal all joints and cut ends using the matching approved kit and its instructions.

Mounting & essential guidance

Fit the correct 8x16mm channel and support the light progressively along its length.

OPTIONAL CLIPS & CHANNEL





Illustrated channel
10.5mm outside width
9mm clear width / 14mm height

Optional clips / channel. These are accessory dimensions, separate from the neon body. Confirm fit before installation.

INSTALLATION METHODS & FIXING POSITIONS



Flush / recessed



Proud head: wrong



Angled screw: wrong

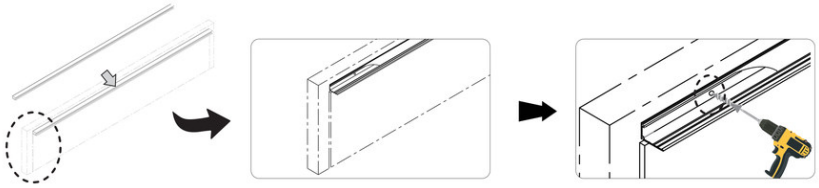

Secure the channel first. Deburr and remove swarf; keep screw heads flush or recessed. Insert progressively by hand. Keep connectors outside the channel and support cables.

BENDING & ESSENTIAL CAUTIONS



120mm minimum bending diameter (60mm radius). Horizontal bend only. Keep the first and last full 55.6mm cut units straight. Never twist, kink, crush or pull the light. Fully unroll before power.

Illustrated fitting and wiring instructions: Install24-0816-RGB.pdf