

## Plain Bendable Aluminium Profile for 15x15mm IP67 Neon Flex

Plain, slotted mounting channel - available in 1 metre, 2 metre and 2.45 metre lengths.


### SPECIFICATION

|                      |                            |
|----------------------|----------------------------|
| Product type         | Bendable aluminium profile |
| Compatible Neon Flex | 15x15mm IP67               |
| Material             | Aluminium                  |
| Profile form         | Plain, slotted channel     |
| Length options       | 1m / 2m / 2.45m            |
| Overall width        | 17 ± 0.2mm                 |
| Overall height       | 16.7 ± 0.2mm               |
| Channel opening      | 15.2 ± 0.2mm               |
| Retention clearance  | 14.6mm                     |
| Wall / central base  | 0.9mm / 0.9mm              |
| Edge-base height     | 2mm                        |
| Bottom recess width  | 11.2mm                     |

### IN THE BOX

1 selected aluminium profile length.  
Neon Flex and other accessories sold separately.

1 metre: 1 screw set - 2 screws + 2 wall plugs.  
2 and 2.45 metres: 2 screw sets - 4 screws + 4 wall plugs.

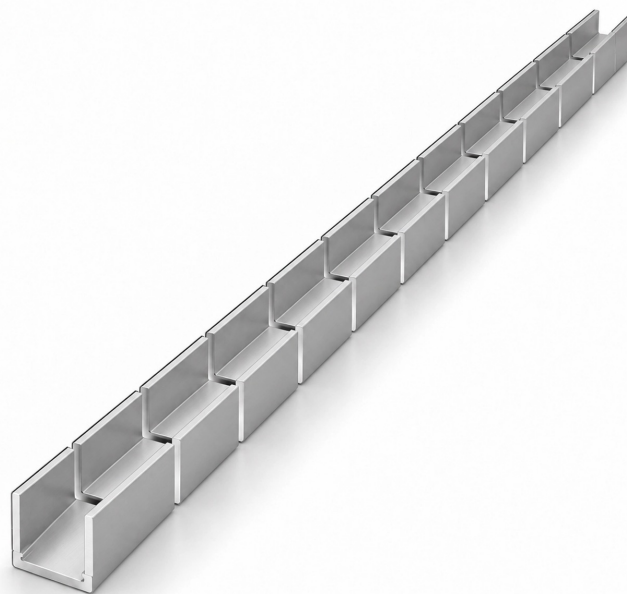

Profile illustration. Refer to the cross-section for dimensions.

### DESCRIPTION


A plain bendable aluminium channel for curved lighting layouts using compatible 15x15mm IP67 Neon Flex. Choose the 1 metre, 2 metre or 2.45 metre profile to suit the layout.

Check the actual Neon Flex fit before fixing. Form the channel around the layout, following the Neon Flex bend direction and minimum bend radius.

Use fixings suitable for the substrate. Remove sharp cut edges, keep screw heads flush or recessed and seat the Neon Flex without forcing it.

IP67 describes the compatible Neon Flex, not the aluminium profile. Follow the Neon Flex installation and sealing instructions.

### DIMENSIONS

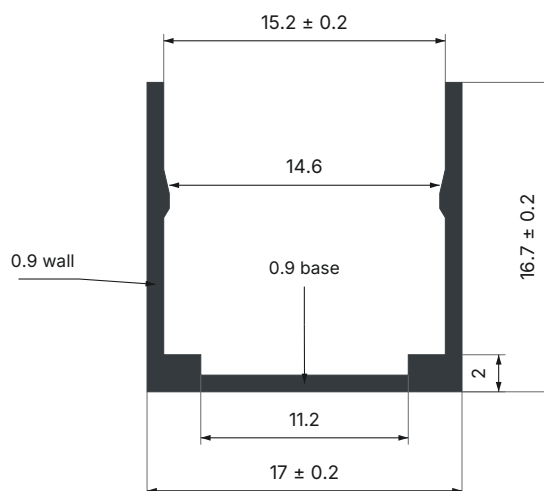

Cross-section in mm. Not to scale.  
Supplied drawing callouts; verify fit before installation.