

Bendable Tile-In Aluminium Profile for 15x15mm IP67 Neon Flex


Bendable mounting channel with a single flange for curved tile-in installations.

SPECIFICATION

Product type	Tile-in aluminium profile
Compatible Neon Flex	15x15mm IP67
Compatible ranges	ATOM LED 24V / 48V
Material	Aluminium
Profile form	Bendable
Length options	1 metre / 2 metres
Overall width	39.2 ± 0.2mm
Channel-body width	19.2mm
Overall height	16.7 ± 0.2mm
Channel opening	15.4 ± 0.2mm
Internal retention width	15mm
Walls / base	2mm / 2mm
Flange thickness	1.5mm
Warranty	7 Years

IN THE BOX

1 selected aluminium profile length.
Neon Flex, fixings and accessories sold separately.

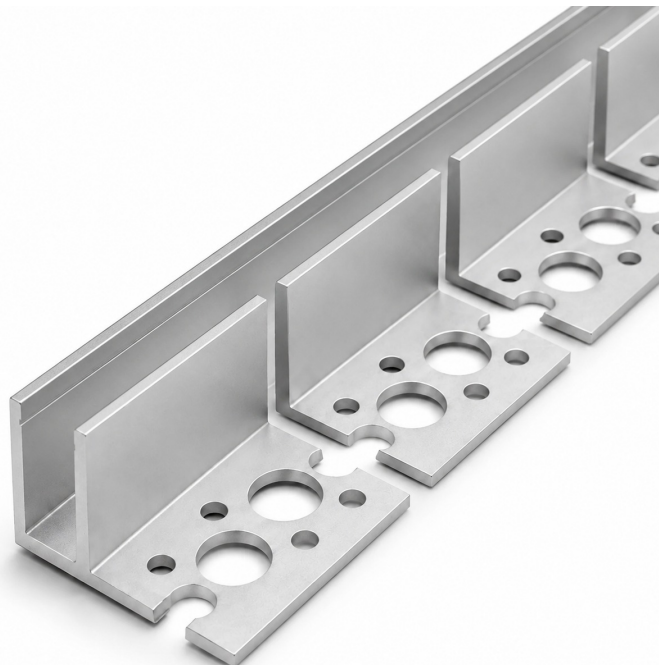

Profile illustration. Refer to the cross-section for dimensions.


DESCRIPTION

A bendable aluminium channel for curved tile-in layouts using ATOM LED 15x15mm IP67 Neon Flex. The single side flange sits beneath the tiled finish while the channel supports the Neon Flex.

Choose a 1 metre or 2 metre length. Form the profile gradually before fitting Neon Flex. Check fit and tile level, keep the channel clear of adhesive or grout, and select suitable fixings.

IP67 and voltage describe the compatible Neon Flex, not the bare aluminium profile. Follow the Neon Flex's permitted bend direction, bending limits and sealing requirements.

DIMENSIONS

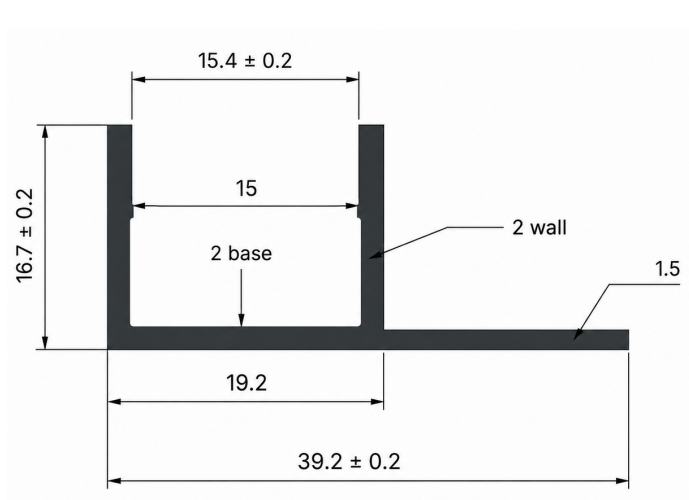

Cross-section in mm. Not to scale.
Supplied drawing callouts; verify fit before installation.