

Made-to-Measure FreeCut COB Under-Cabinet Lighting 24V

340 LEDs/m | 9W per metre | Cut anywhere | 10m powered from one end

7 Years WARRANTY	IP20 IP RATING	10m MAX RUN	Anywhere CUT	10mm PCB WIDTH	2700K-6500K COLOUR TEMP	24V DC
----------------------------	--------------------------	-----------------------	------------------------	--------------------------	-----------------------------------	------------------

SPECIFICATIONS


LED type	COB LED Strip
Voltage	24V DC
PCB width	10mm
LEDs per metre	340
Colour temperature	2700K-6500K
Nominal power	9 W/m
Nominal light output	To be confirmed
Calculated output at 10m	To be confirmed
CRI / SDCM	Ra >90 / SDCM: TBC
Cut interval	Cut anywhere
Max Length	10 Metre
Cable Length	15cm
Adhesive	3M Tape
IP rating	IP20 - dry indoors
Warranty	7 Years



Unlit FreeCut construction illustration. Colour output is specified for the selected product.

TBC = to be confirmed. Unspecified figures are not inferred from another strip.

CHOOSING A COLOUR TEMPERATURE

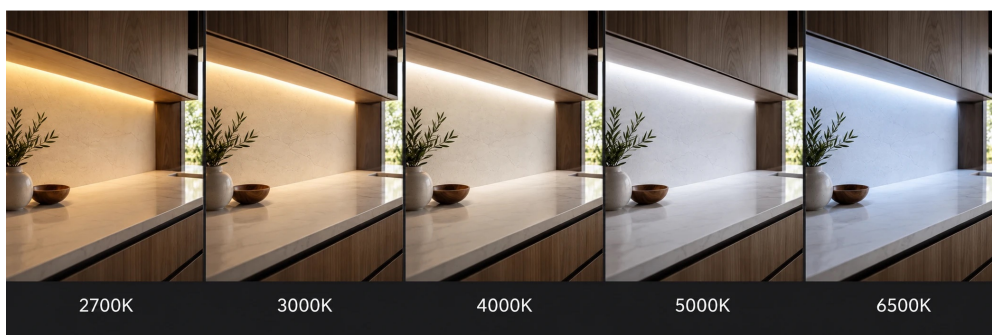


Illustrative colour-temperature comparison; finishes, dimming and screens affect appearance.

2700K	Soft golden - white for bedrooms, living spaces and hospitality.	3000K	Warm everyday light for kitchens, shelving and relaxed interiors.
4000K	Neutral white for worktops, wardrobes and practical task lighting.	5000K	Crisp daylight white for work areas, displays and utility rooms.
6500K	Cool white for bright display details and contemporary interiors.		

Dimensions, description and handling

Dimensions, description and what arrives in the box

DIMENSIONS

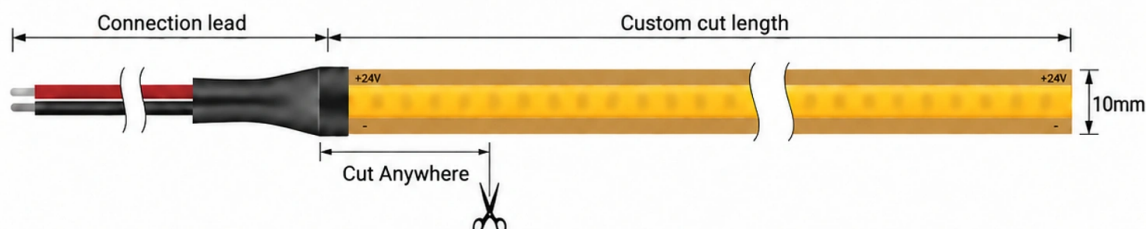

PCB width 10mm. Maximum powered run 10m from one end. 15cm connection lead included.

DESCRIPTION

This 10mm FreeCut COB strip uses 24V DC, 340 LEDs per metre and 9W/m to create a smooth line of light. Choose from five fixed white tones for dry kitchen cabinetry and joinery.

The lights are custom cut to length to suit your specific requirement. FreeCut construction has no fixed cutting interval. Make a clean, supported cut with power disconnected; electrical connections still need suitable accessible contacts.

Use up to 10m powered from one end. Calculated strip loads: 1m = 9W; 5m = 45W; 10m = 90W. Select a regulated 24V constant-voltage driver and follow its specified headroom and ventilation requirements.

Mount in a suitable profile in dry indoor areas. Check channel clearance, cable voltage drop, connector current capacity and any single-colour dimmer before fitting.


Lifetime: To be confirmed | Operating temperature: To be confirmed | Certification: To be confirmed

IN THE BOX

- FreeCut COB strip in the selected or made-to-measure length, with 1 × 15cm connection lead.

WIRING DIAGRAM

Non-dimmable

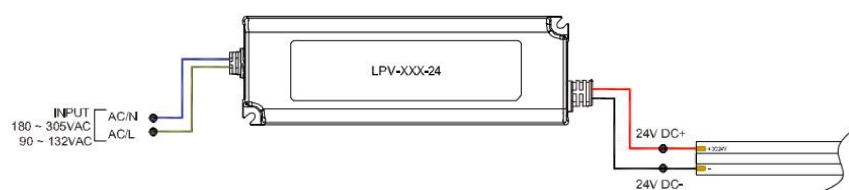

3 in 1-dimmable



Non-dimmable and 3-in-1 dimmable 24V driver examples. Driver and controls are separate unless selected.

Cautions

Read before cutting, bending or powering the strip

HANDLING AND INSTALLATION




Unroll and support

Position the strip gradually. Keep the PCB supported and free from tension.




Keep the reel controlled

Feed progressively from the reel during fitting. Fully unroll before applying power.

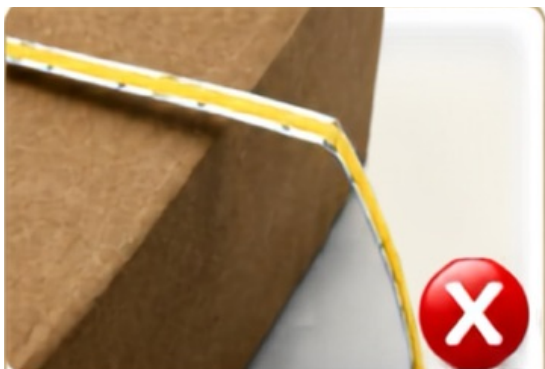

Avoid sharp folds

Do not crease the strip around a sharp corner or twist it across its width.

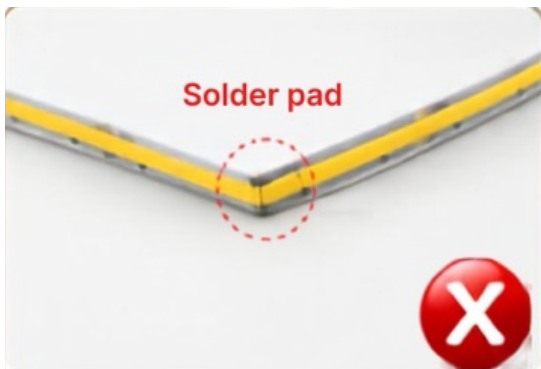

Protect solder pads

Do not bend at a pad or joint. Support cables so they cannot pull on the connection.

SAFETY WARNINGS

WARNING: Use only a 24V constant-voltage DC supply matching the voltage marked on the light. Never connect the DC light directly to 220-240V AC mains; incorrect voltage can damage it.

- Observe polarity. Insulate unused conductors separately and never short + and -. Any multi-point feeding must follow a properly designed 24V circuit.
- Never power the strip while it is coiled on the reel. Heat builds in the coil, which can damage the LEDs and adhesive and create a fire risk.
- The strip is static-sensitive. Wear an anti-static wrist strap or suitable gloves when handling it.



Damage caused by incorrect voltage or direct mains connection is not covered by warranty where ATOM LED is not at fault. ATOM LED Lighting Ltd accepts no liability for loss or damage caused by such connection where it is not at fault. This does not exclude liability for our negligence or breach of statutory duty, or affect your statutory rights.

For product selection, connection preparation or help with your project, contact ATOM LED: 01952 370028 | sales@atomled.co.uk.

Compatible profiles

Aluminium channels and silicone covers sized to accept this 10mm PCB

ALUMINIUM AND SILICONE PROFILE OPTIONS

 SURFACE ALPROFILE-509 17×8mm 1m / 2m	 SURFACE PROF-1210B-1M 12×10mm 1m; 2.45m version also available	 RECESSED ALRPROF25X7X12-508 25×7mm 1m / 2m	 RECESSED ALPROFILE613B 24×14.2mm 1m
 CORNER CP16X16MM-1M-WH 16×16mm 1m / 2m	 CORNER PROFILE614 19×19mm 1m / 2m	 PLASTER-IN S-PIP-P1513-1M 55.5×13mm 1m / 2m / 2.45m	 PLASTER-IN B-PIP-P2015-2M bendable 2m / 3m
 SILICONE T1510 15×10mm 1m-20m; 25m-50m in 5m steps	 SILICONE T1616 16×16mm 1m-20m; 25m-50m in 5m steps	 SILICONE T2010 20×10mm 1m-20m; 25m-50m in 5m steps	 SILICONE SD1220 12×20mm 1m-20m; 25m-50m in 5m steps

Profile sizes shown are the external channel/cover dimensions, not the LED strip dimensions. Confirm connector clearance and thermal suitability for the chosen length and load. A silicone cover does not by itself make an IP20 strip waterproof.

Click a profile card to view current lengths and ordering options. Profiles, covers, drivers and controls are separate accessories unless included in your order. Contact ATOM LED for help choosing a suitable mounting detail.