


# Smart Panel Remote Controller

Smart Panel Remote Controller is a newly developed remote controller. This Panel remote controller is designed by a delicate and fashionable tempered glass panel; And we adopt a high precision Capacitive touch screen IC. Touch Screen is very stable; 2.4GHz high RF wireless control with long distance controlling, low power consumption and high speed transmitting rate. This product widely work on our smart LED Lighting, LED Controller and Smart panel controller, etc.



Press the Master off button to turn off all the lights;  
Long press it, go to night light for all lights.

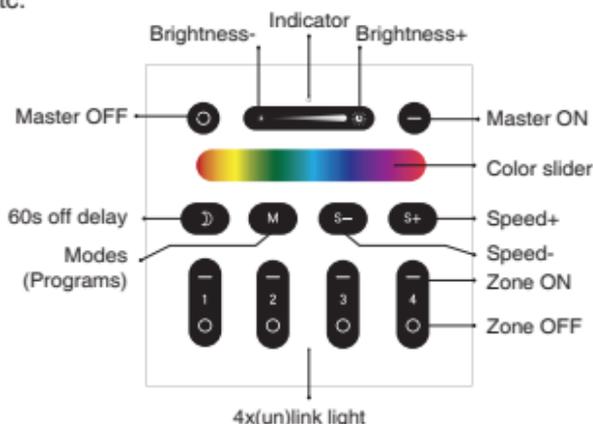

Press the Master on button to choose all lights to control and turn on all the lights; Long press it, go to white light for all lights.



Touch the slider to choose any brightness



Touch the color slider to choose any color you like



Slow down the speed of the dynamic mode.



Accelerate the speed of the dynamic mode.



Press the zone-off button to turn off all the lights in this zone; Long press it, go to night light for all lights.



Press the zone-on button to choose the zone to control and turn on all the lights in this zone; Long press it, go to white light for all lights.



Press M button, go to color changing mode, 9 modes to choose.




**Long press M button, go to Saturation mode, r/g/b/w co-exsit, you can choose any color, and change the brightness of white.**



**Press the button, lights will be turned off after 60s.**



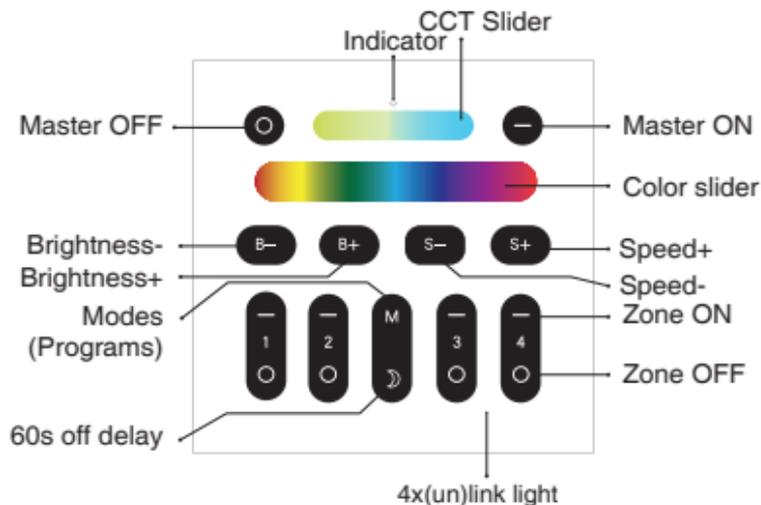

Press the Master off button to turn off all the lights;  
Long press it, go to night light for all lights.



Press the Master on button to choose all lights to control and turn on all the lights; Long press it, go to white light for all lights.



Touch the CCT slider to choose the light from 2700K-6000K



Touch the color ring to choose any color you like



Touch the slider to choose any brightness



Slow down the speed of the dynamic mode.



Accelerate the speed of the dynamic mode.



Press the zone-off button to turn off all the lights in this zone; Long press it, go to night light for all lights.



Press the zone-on button to choose the zone to control and turn on all the lights in this zone; Long press it, go to white light for all lights.



Press M button, go to color changing mode, 9 modes to choose.

**Long press M button, go to Saturation mode, r/g/b/c/w co-exsit, you can choose any color, and change the brightness/color-temperature of white.**




**Press the button, lights will be turned off after 60s.**

## Link / Unlink

**Link:** First power off, then power on, within 3 seconds touch any of the Zone '1' button 3 times shortly, the link is done when you see the light blinks 3 times, otherwise try again later.





**Unlink:** First power off, then power on, within 3 seconds touch the linked Zone '1' button or the Master '1' button 5 times shortly, the unlink is done when you see the light blinks 9 times, otherwise try again later.

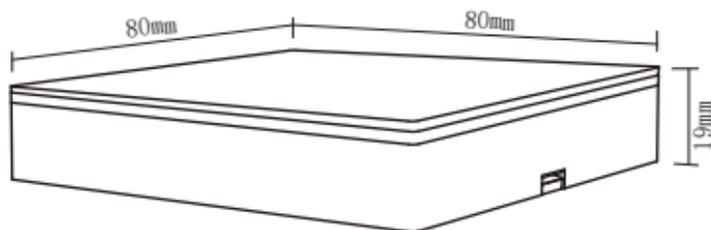

Working Temperature: -20-60 °C  
Input Voltage: 3V(2\*AAA Battery)  
Radio Frequency: 2400-2483.5MHz  
Modulation Method: GFSK


Transmitting Power: 6dBm  
Control Distance: 30m  
Standby Power: 15uA  
Size: 80x80x19mm

## Installation/ Dismantlement

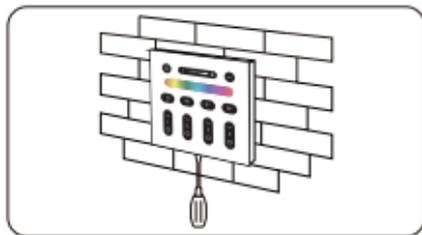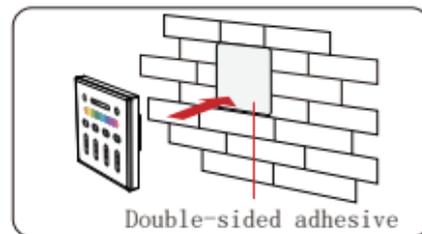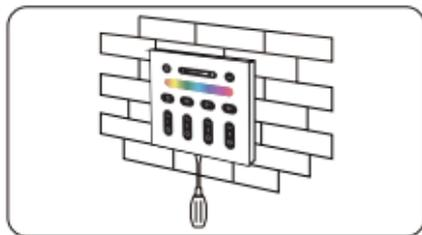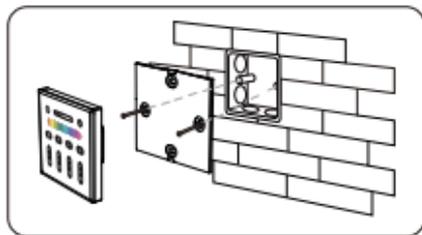

## Battery Installation

Please take the remote control and carefully press the battery cover and push it away in a downward motion. Install two AAA batteries, exactly match the negative (-) pole of each battery to the largest spring. Place the battery cover back and install tightly.

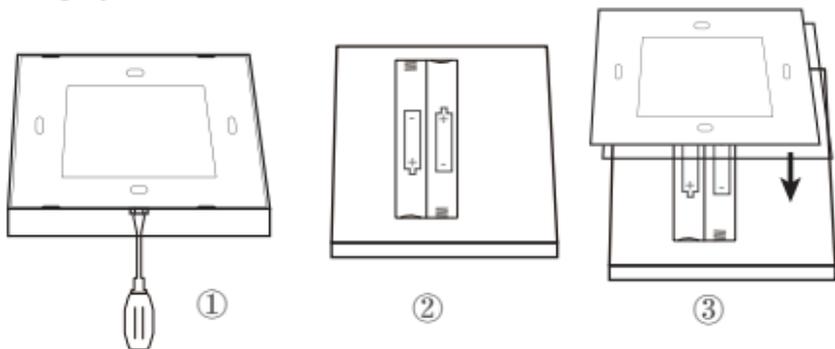

## Warranty:

Warranty policy is valid if the product is used in accordance with the instructions and for its intended purpose.

## Cleaning and maintenance:

To avoid scratching, the product should only be cleaned with a soft dry cloth. Do not use cleaning agents.

## Disposal of your old product:



Your product is designed and manufactured with high quality materials and components, which can be recycled and reused. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2011/65/EU.

Please find out for yourself about the local separate collection system for electrical and electronic product.

Please act according to your local rules and do not dispose of your old products with your normal household waste. The correct disposal of your old product will help prevent potential negative consequences for the environment and human health.

